


Section _____ Town _____ Range _____

Sept 10 1982

I commenced a Survey of Section 34, T. 6, R. 7
for M. Quinley & Ira V. Corbin

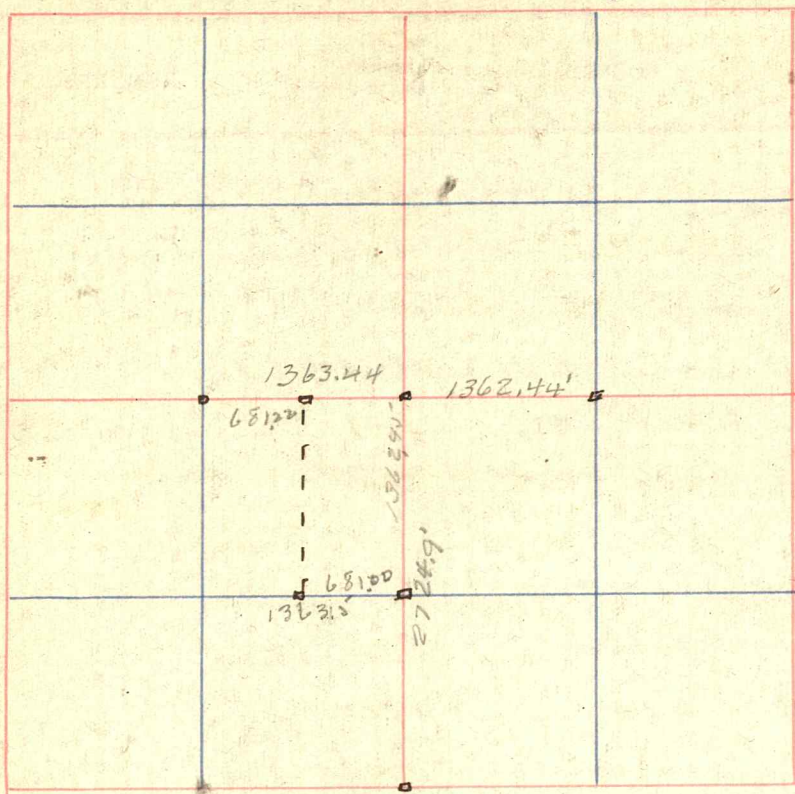

Cliff Adams }
C. B.

Henry G. Schmitt
Surveyor Greene County.

Var.

| Course. | Point of Beginning. | Lat Distance. | Corrected Bearings. |
|---------|---------------------|------------------|---------------------|
| West | Cor 1/4 | 1363.44 | to N 1/4 SW. |
| South | Cor 1/4 | 2724.90 | to S 1/4. |

| CORNER ESTABLISHED. | Monument. | Device. | WITNESS POINTS OR BEARING TREES. | Mark or Dia. in Inches. | COURSE. | ft. Distant. | REMARKS. |
|---------------------|-----------|---------|----------------------------------|-------------------------|-------------------------|------------------------|-----------------------------|
| E 1/4 - SW | Stone | | Stone Oak Cor Post | 12" 12" | South South East | 10.0 136.1 16.3' | Cor. comes in ditch |
| S 1/4 NE - SW | Stone | | | | | | |
| N 1/4 NE - SW | " | | | | | | |
| Cor 1/4 found Stone | | | New wit Peach Oak | 2" | S 41° E | 27.93 | |
| N 1/4 SW | Stone | | Stone in 12 ft West of | | Low of 3' arch culvert. | | Stone in bottom of Culvert. |
| Cor 1/4 SW | Stake | | | | | | |